




*Layman's Guide
to
ANSI X3.182*



This Guideline was developed by AIM USA, an affiliate of AIM International, the world-wide trade association for manufacturers and providers of automatic data collection products, services, and supplies.

This document is intended as a guide to aid the manufacturer, the consumer, and the general public. The use of the document and material contained therein is entirely voluntary. The material presented should not be used as a substitute for user's engineering judgement.

CAUTION: THIS GUIDELINE MAY BE REVISED OR WITHDRAWN AT ANY TIME.

While a rigorous review process was followed, AIM USA, its member companies, and its officers assume no liability for the use of this document.

Published by:
AIM USA
634 Alpha Drive
Pittsburgh, PA 15238-2802
USA
Phone: (412) 963-8588
Fax: (412) 963-8753
BBS: (412) 963-9047
email: tech@aimusa.org
World Wide Web: <http://www.aimusa.org>

Copyright © AIM Inc. 1993

All rights reserved. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Printed in the United States of America.

It is the intent and understanding of AIM USA that the information presented in this guideline is entirely in the public domain and free of all use restrictions, licenses and fees.

December 1994

Contents

1 Introduction	1
2 Aperture and Wavelength	1
3 Scan Reflectance Profile	1
3.1 Edge Determination	3
3.2 Minimum Reflectance	4
3.3 Minimum Edge Contrast	6
3.4 Symbol Contrast	8
3.5 Modulation	10
3.6 Defects	13
3.7 Decodability	13
3.8 Decode	13
4 Scan Grade	13
5 Overall Symbol Grade	13
6 Numeric Conversion	13
7 Significance of Grade Level	13

1 Introduction

The first published document concerning the issue of printed bar code quality was the Uniform Code Council (UCC) Universal Product Code (U.P.C.) Symbol Specification and U.P.C. Verification manuals. Quality parameters for checking the quality of bar codes had to do with:

Did the bar code meet the required format structure?

Did it have the right characters in the right positions?

Did it have the correct number of encoded characters?

Did the background and bar contrast (color) or reflectance meet the correct criteria for a bar code scanner to “see” the bar code? (At that time, scanners were primarily based on helium neon lasers which “see” everything as if it had red glasses on.)

Did the widths of the bars and spaces meet the industry specifications?

Were the quiet zones wide enough?

Was the height of the bar code correct?

In 1982 the American National Standard Institute, (ANSI) X3A1 Technical Sub-committee with the assistance of other ANSI and industry committees and bar code authorities, began studying the issue of bar code print quality. Through the years, bar codes had been printed that met the existing standards, but would not scan. More often bar codes printed out of specified standards did scan.

This combined group knew that the existing specifications for quality control of bar codes were evaluating criteria based on the way the human eye “viewed” the bar codes. This was not the way any bar code scanner would “see” the bar code. A bar code scanner is an optical device and does not incorporate human eye optical properties when “looking” at a bar code. The ANSI X3A1 group evaluated what factors were important to the many different types of bar code scanners/decoders for

high first read rates and readability. After eight years of extensive testing, American National Standard X3.182-1990 Bar Code Print Quality Guideline was published. That document outlines quality parameters based on the optics of bar code scanning systems.

Today many groups including the UCC, ANSI/Material Handling Institute and Automotive Industry Action Group have specified conformance to ANSI X3.182 1990 Bar Code Print Quality Guideline. The present literature will outline the parameters of bar code quality from the ANSI document. It will discuss the importance of these parameters, and what corrective action is necessary to greatly improve bar code print quality.



2 Aperture and Wavelength

The aperture size and wavelength has a significant impact as to the grade results obtained. For instance, a symbol checked with a 5 mil aperture with a 633 nm (red) wavelength light source might achieve a grade of D (poor). The same symbol could be verified with a 10 mil aperture at the same wavelength and receive a grade of B (good), and then receive a grade F (fail) if verified with a 10 mil aperture with a 900 nm (non-visible light source). The ANSI guideline also recommends the aperture diameter based on the “X” dimension of the bar code being verified. The aperture and wavelength specified in **Industry Application Standards** takes precedence over the ANSI guideline, even if some X dimensions ranges do not agree with the ANSI recommendations.

DIAMETER (in .001")	"X" DIMENSION RANGE
03	.004" to .007"
05	.0071" to .013
10	.0131" to .025"
20	.0251" and larger

3 Scan Reflectance Profile

The ANSI X3.182-1990 Bar Code Print Quality Guideline outlines several parameters that greatly effect the quality of the printed bar code. These parameters are tested by creating a Scan Reflectance Profile. A Scan Reflectance Profile is a record of

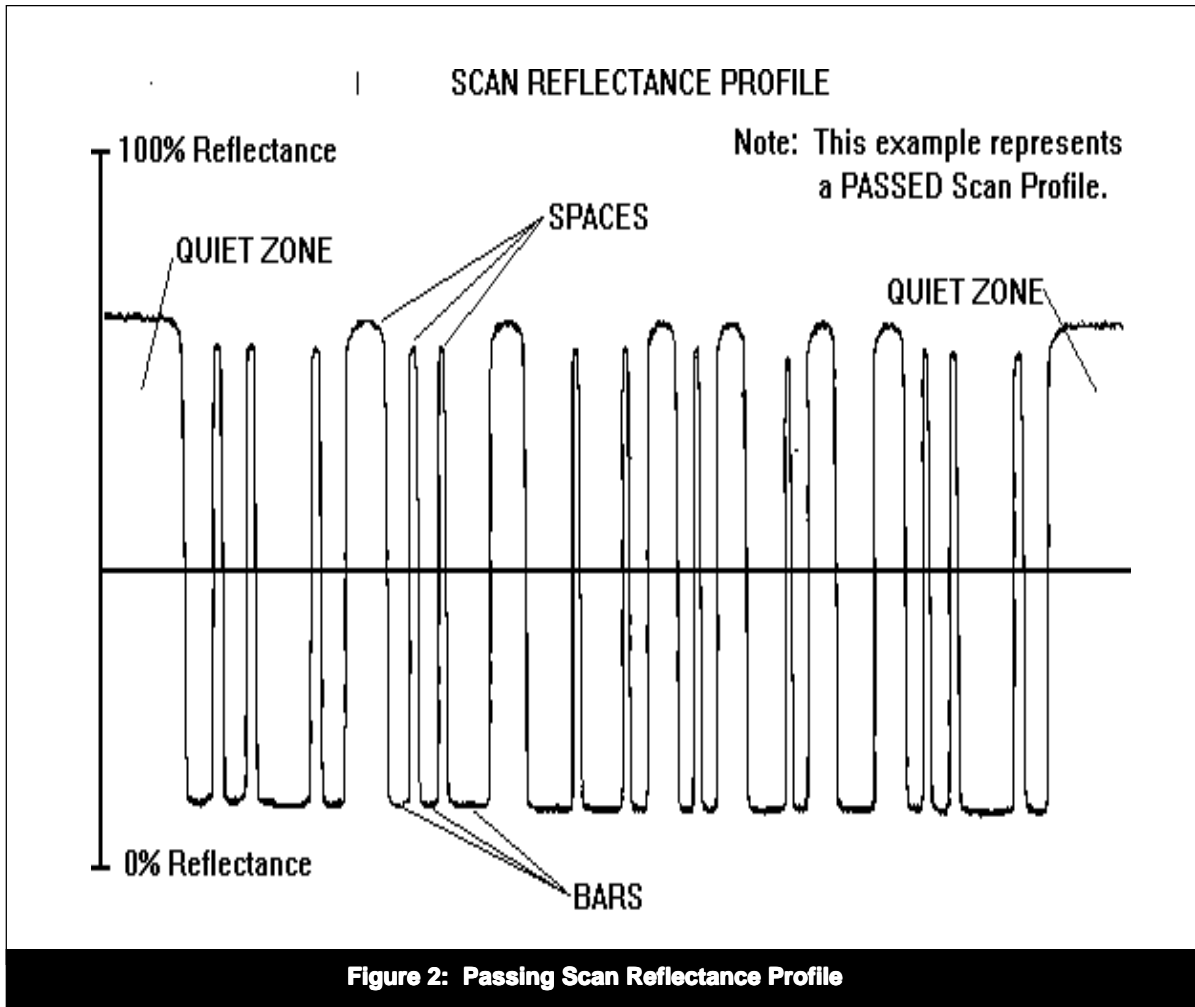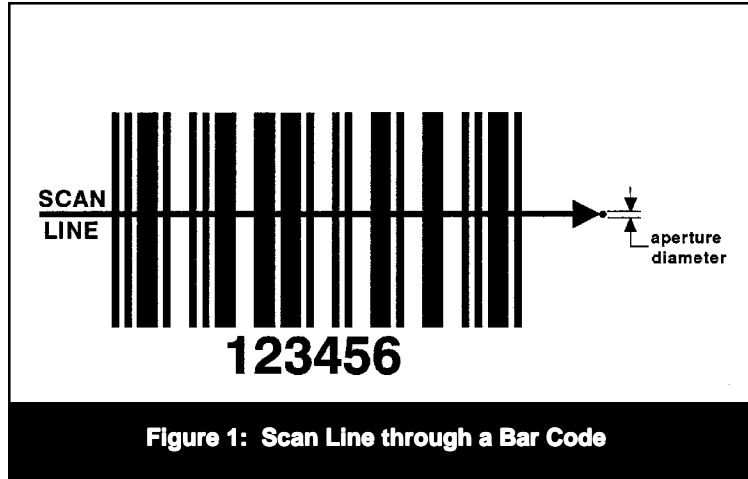

the reflectance values (00% to 100%) measured along a single line across the entire width of the bar code. Figure 1 illustrates a scan line passing through a bar code symbol that would be used to generate the scan reflectance profiles that are illustrated in this document. These values are charted to create an analog representation of the bar code. Each Scan Reflectance Profile will either Pass, Fail or be graded as A, B, C, D, OR F(*referred to as a Scan Grade*) for one or possibly more of specified criteria as described in the ANSI document and further explained in this document. Ten Scan Reflectance Profiles are required to determine *Symbol Grade*. (See figure 2 for a Passing profile and figure 2A for a Failing profile.)

After creating the Scan Reflectance Profile, a count of the elements (bars and spaces) is done to determine if the bar code conforms to some type of

symbolgy. But before this can be accomplished, Edge Determination must be done.

3.1 Edge Determination (Pass/Fail)


- GT = Global Threshold
- R_{min} = Reflectance Minimum
- SC = Symbol Contrast


Formula:

$$GT = R_{min} + SC/2$$

Definition:

In order to discern bars and spaces, a Global Threshold is established on the scan reflectance profile by drawing a horizontal line half way

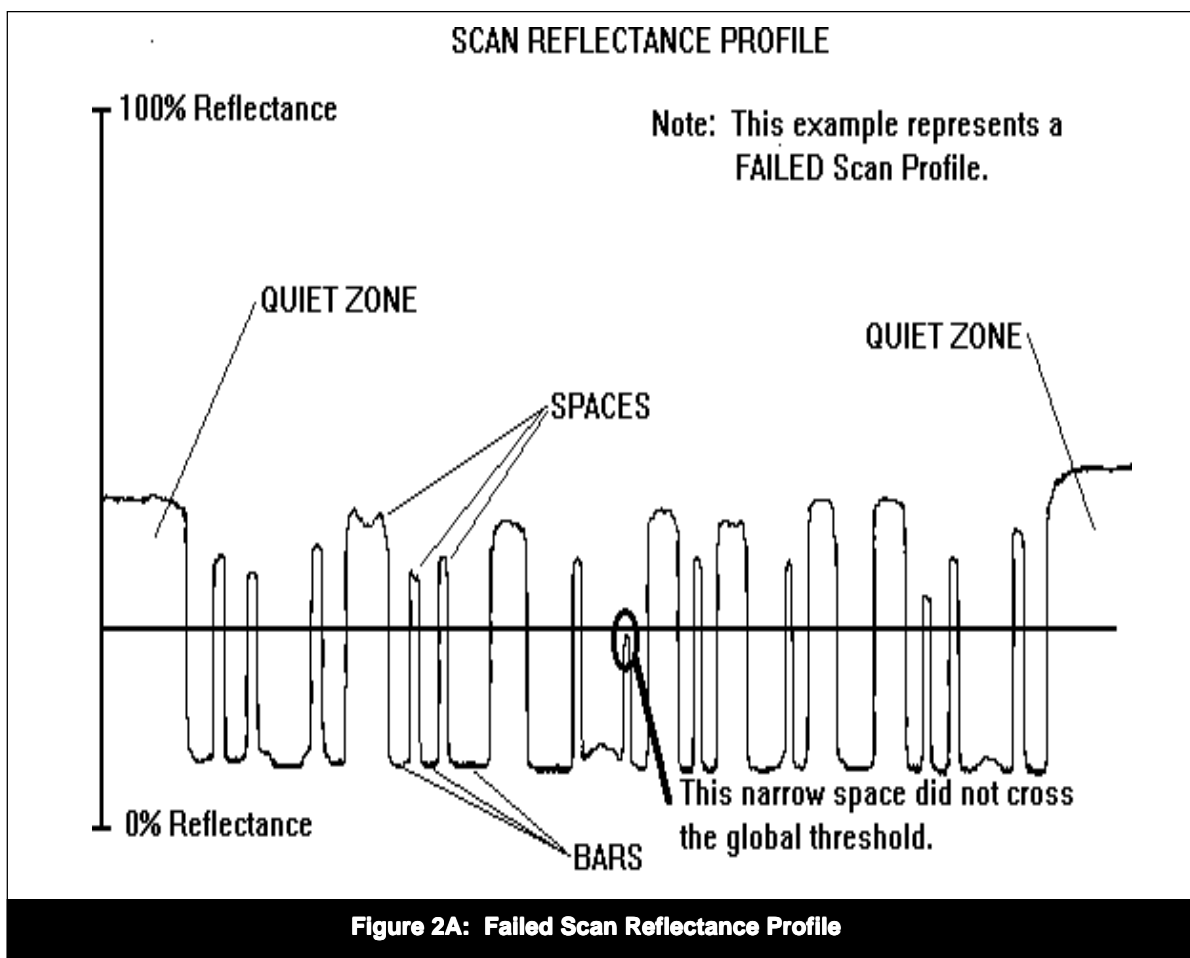

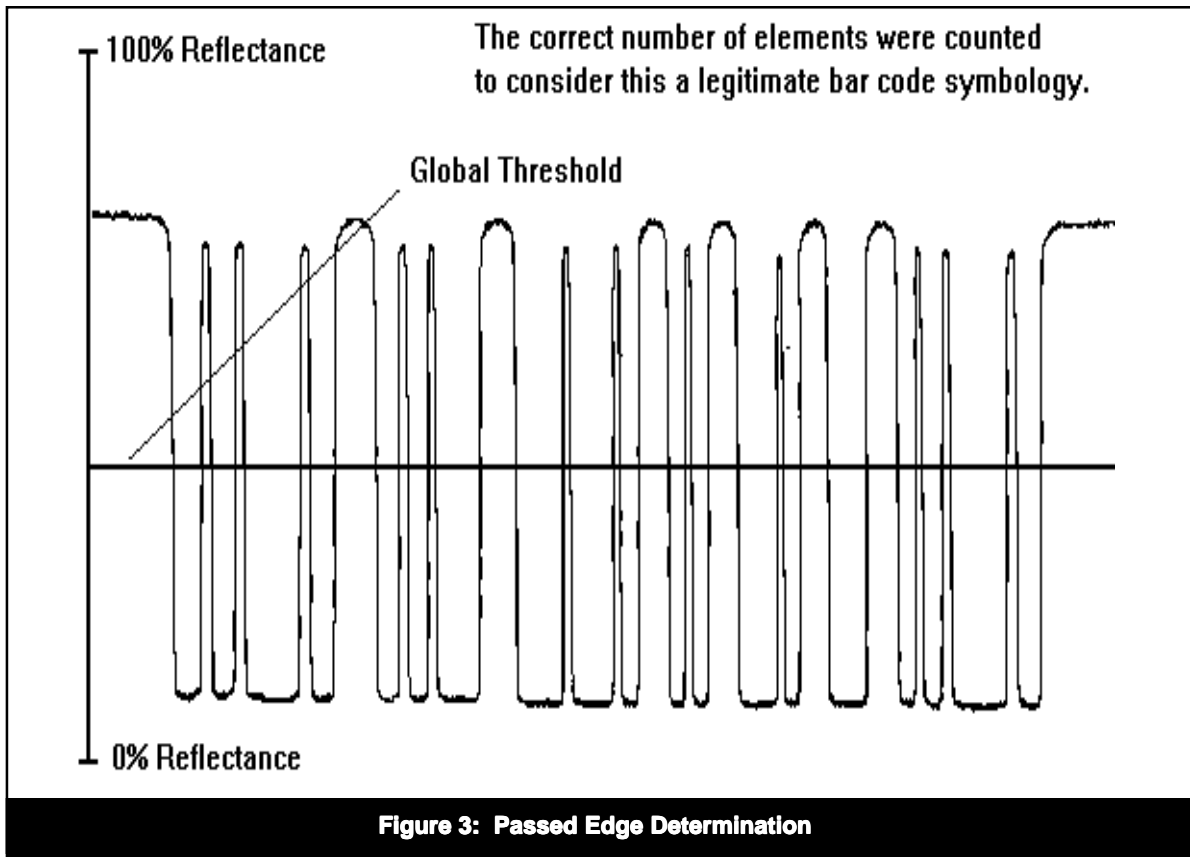

between the highest reflectance value and the lowest reflectance value seen in the profile. Edge Determination can then be done by counting the number of crossings at the Global Threshold confirming whether the count conforms to or is considered non-conforming to a legitimate bar code symbology. If the bar code conforms it Passes; if it is considered non-conforming it Fails. (See Figure 3 for a Pass on Edge Determination and Figure 3A for a Fail on Edge Determination)

After the bar code has passed Edge Determination, there are seven parameters that must be tested. Of these parameters 3 are either Pass or Fail and 4 are graded A, B, C, D or F, where A is the best and F equals a Fail. The testing of these parameters are done in sequence as is shown in the flow chart in figure 9.

3.2 Minimum Reflectance (Pass/Fail)

R_{min} = REFLECTANCE MINIMUM

R_{max} = REFLECTANCE MAXIMUM

Formula:

$R_{min} \leq .5 R_{max}$ = Pass

$R_{min} > .5 R_{max}$ = Fail

Definition:

The reflectance value for at least one bar must be half or less than the highest reflectance value for a space. If the highest space reflectance value is equal to 80% the reflectance value of at least one bar in the profile must be 40% or less. (See figure 4 for a Passing Minimum Reflectance and figure 4A for a Failing Minimum Reflectance)

Suggestions for improving Minimum Reflectance:

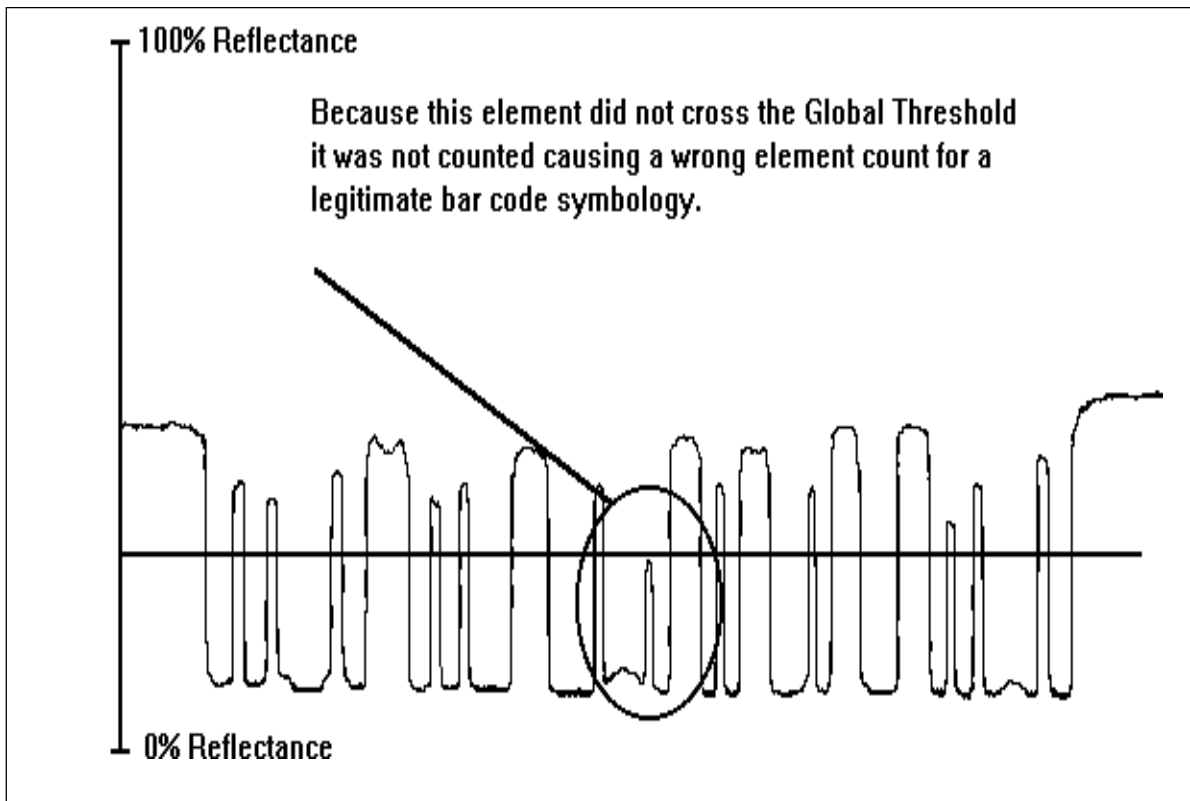


Figure 3A: Failed Edge Determination

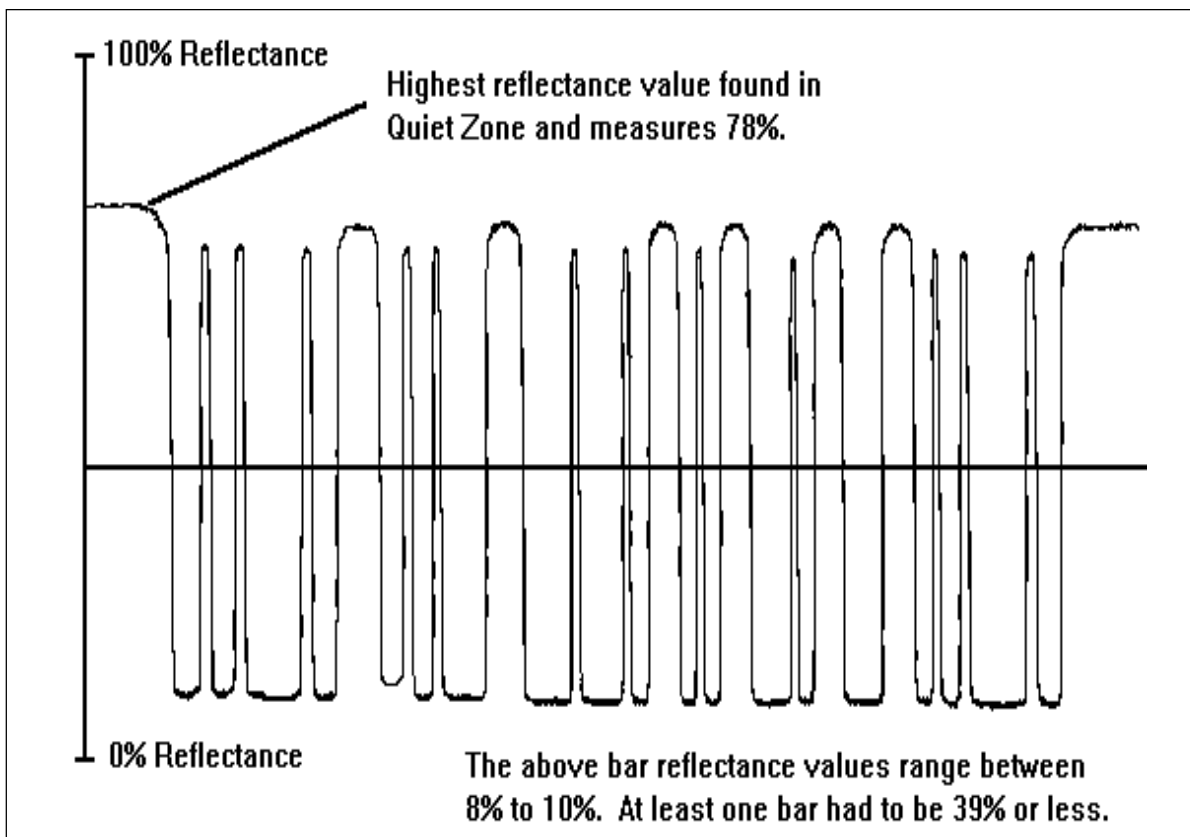


Figure 4: Passing Minimum Reflectance Test

Making bars darker, i.e. darker ink or for thermal printing increasing heat.

3.3 Minimum Edge Contrast, EC_{min} (Pass/Fail)

Rs = Space Reflectance
Rb = Bar Reflectance

Formula:

$$EC_{min} = R_{s_{min}} - R_{b_{max}} \text{ (worst pair)}$$

$\geq 15\%$ = Pass
 $< 15\%$ = Fail

Definition:

Each transition from a bar to a space, or back again, is an “edge” whose contrast is determined as the difference between peak values in that space and

that bar. Each edge in the scan profile is measured, and the edge that has the minimum contrast from the transition from space reflectance to bar reflectance, or from bar to space, is the Minimum Edge Contrast or EC_{min} . (See figure 5 for a Pass on EC_{min} and figure 5A for a Fail on EC_{min})

Suggestions for improving Minimum Edge Contrast (EC_{min}):

Using a “lighter” substrate and darker ink, or increasing the X dimension (minimum element width), assuming the appropriate aperture size is used.

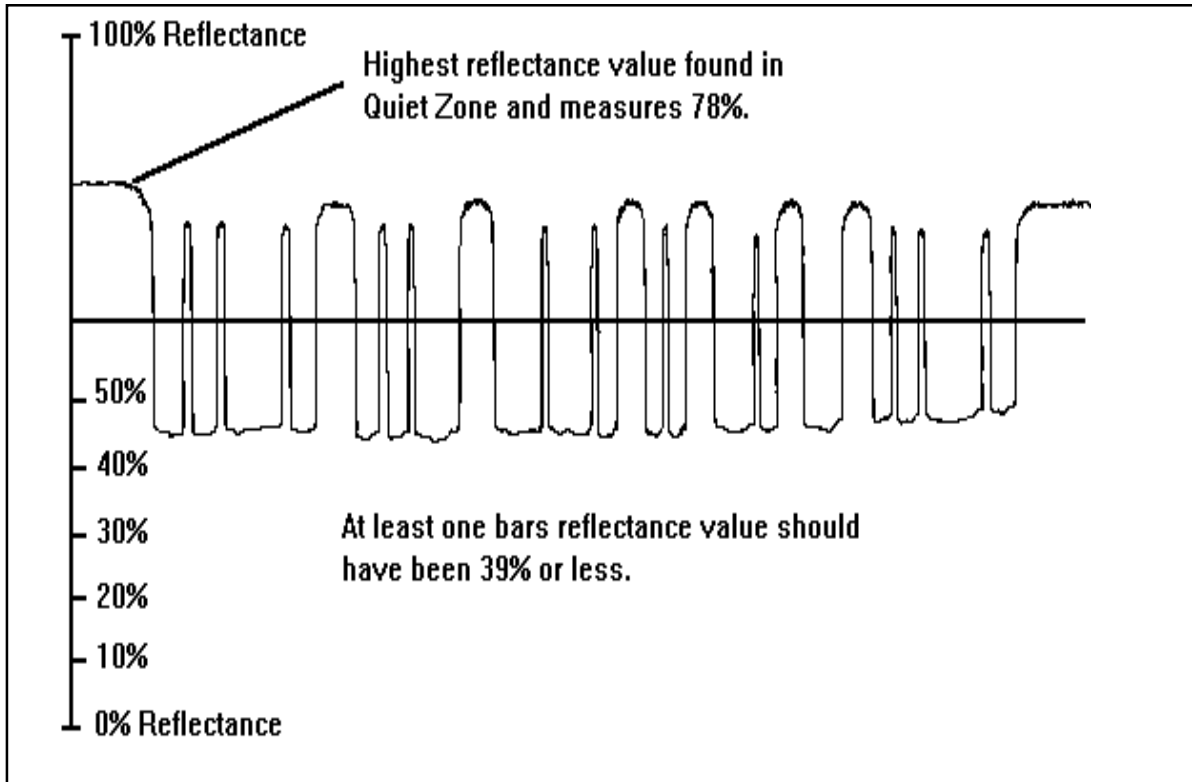
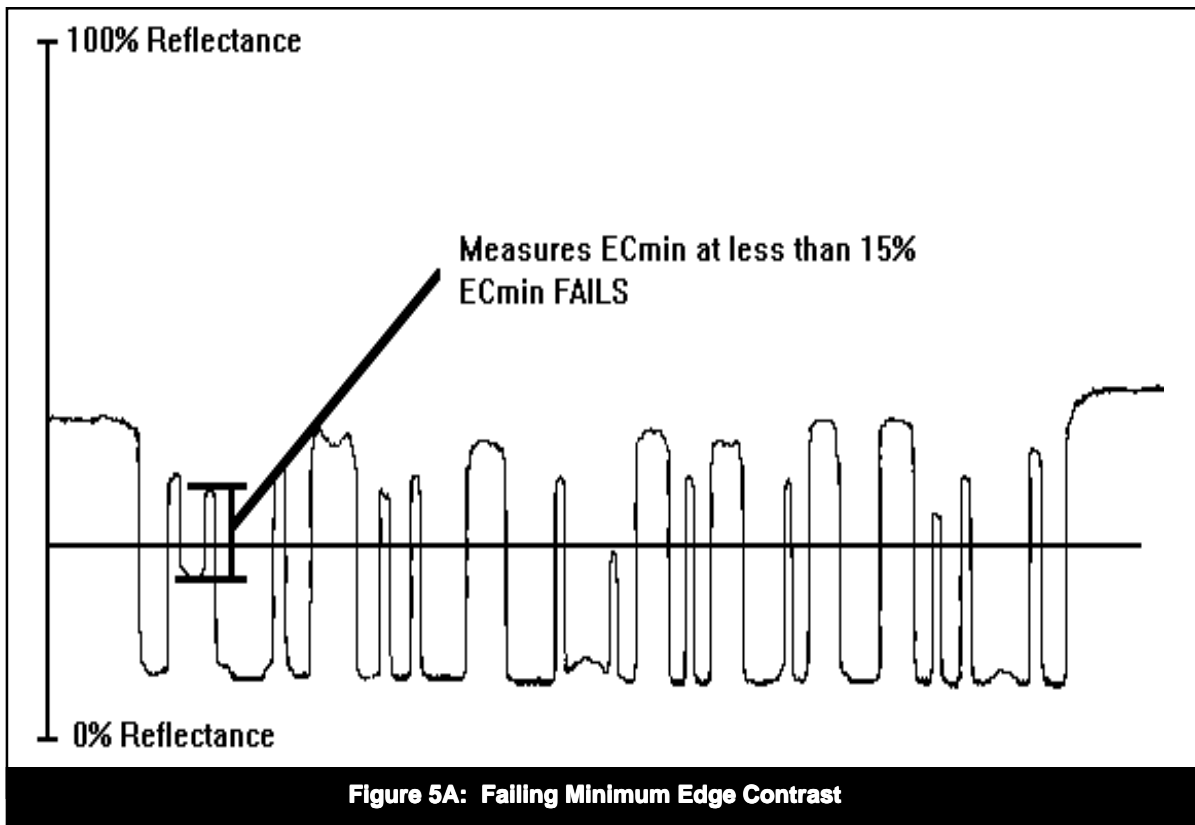
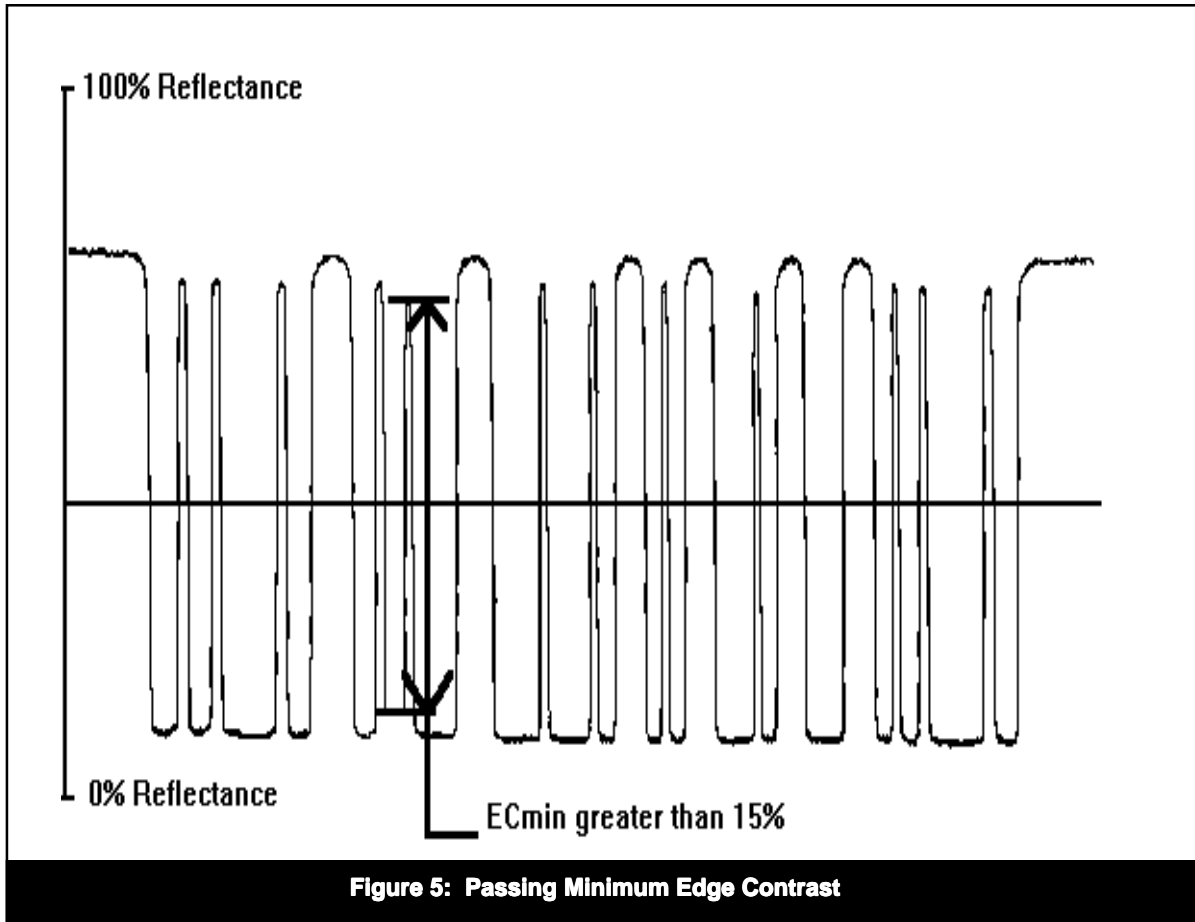


Figure 4A: Failing Minimum Reflectance Test



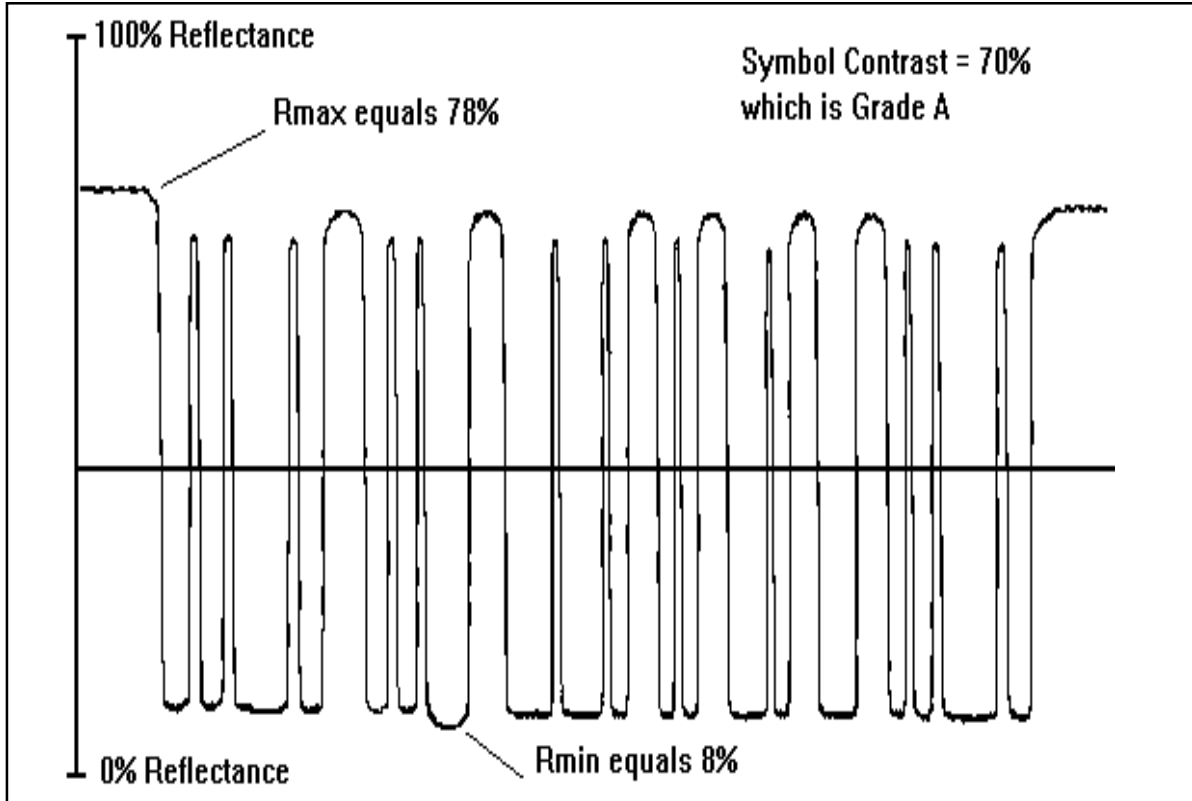


Figure 6: Grade A Symbol Contrast

3.4 Symbol Contrast, SC (Graded)

SC = Symbol Contrast
 R_{max} = Reflectance Maximum
 R_{min} = Reflectance Minimum

Formula:

$$SC = R_{max} - R_{min}$$


- ≥ 70% = A
- ≥ 55% = B
- ≥ 40% = C
- ≥ 20% = D
- < 20% = F

Definition:

Symbol Contrast is the difference between the highest reflectance value and the lowest reflectance value in the scan profile. The higher the value the better the grade. (See figure 6 for a grade A Symbol Contrast and figure 6A for a grade F Symbol Contrast)

Suggestions on improving Symbol Contrast:

Make the bars darker and the spaces lighter or less shiny. Shiny materials such as laminates, polished metals and high gloss are a special case as they usually fail to reflect much light back in the direction it was received. This causes the reflectance values to be lower in those shiny areas.

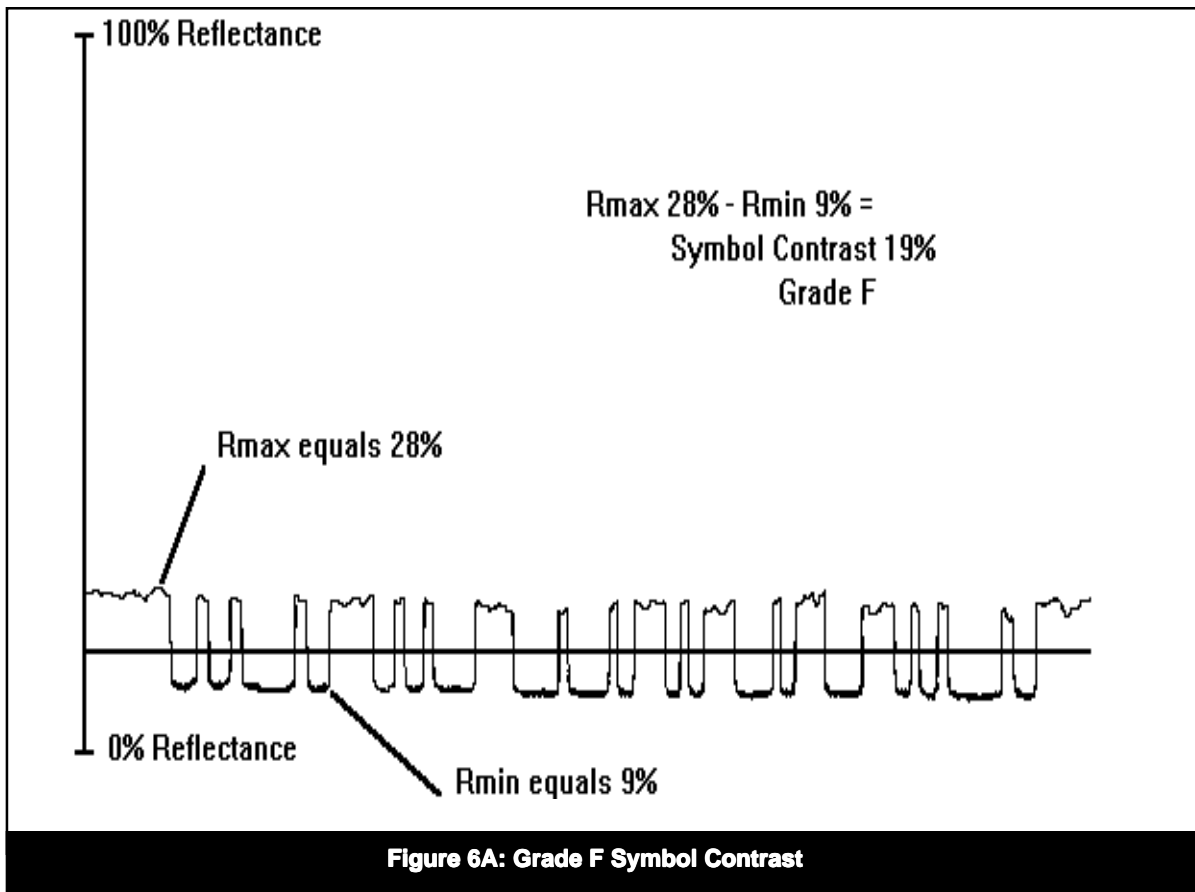

3.5 Modulation (Graded)

EC_{min} = Edge Contrast Minimum
SC = Symbol Contrast

Formula:

$$EC_{\min}/SC$$

$$\geq .70 = A$$

$$\geq .60 = B$$

$$\geq .50 = C$$

$$\geq .40 = D$$

$$< .40 = F$$


Definition:


Modulation has to do with how a scanner “sees” wide elements (bars or spaces) in relationship to narrow elements, as represented by reflectance

values in the scan profile. Scanners usually “see” spaces narrower than bars and scanners typically “see” narrow spaces being even less intense or not as reflective as wide spaces. (See figure 7 for grade A on modulation and figure 7A for a grade F on modulation.)

Suggestions for improving Modulation grade:

Making narrow spaces wider than the narrow bars usually will increase the Modulation grade. Measuring with a smaller aperture will often increase the Modulation grade, but the measurement aperture should always be the correct one for the application.

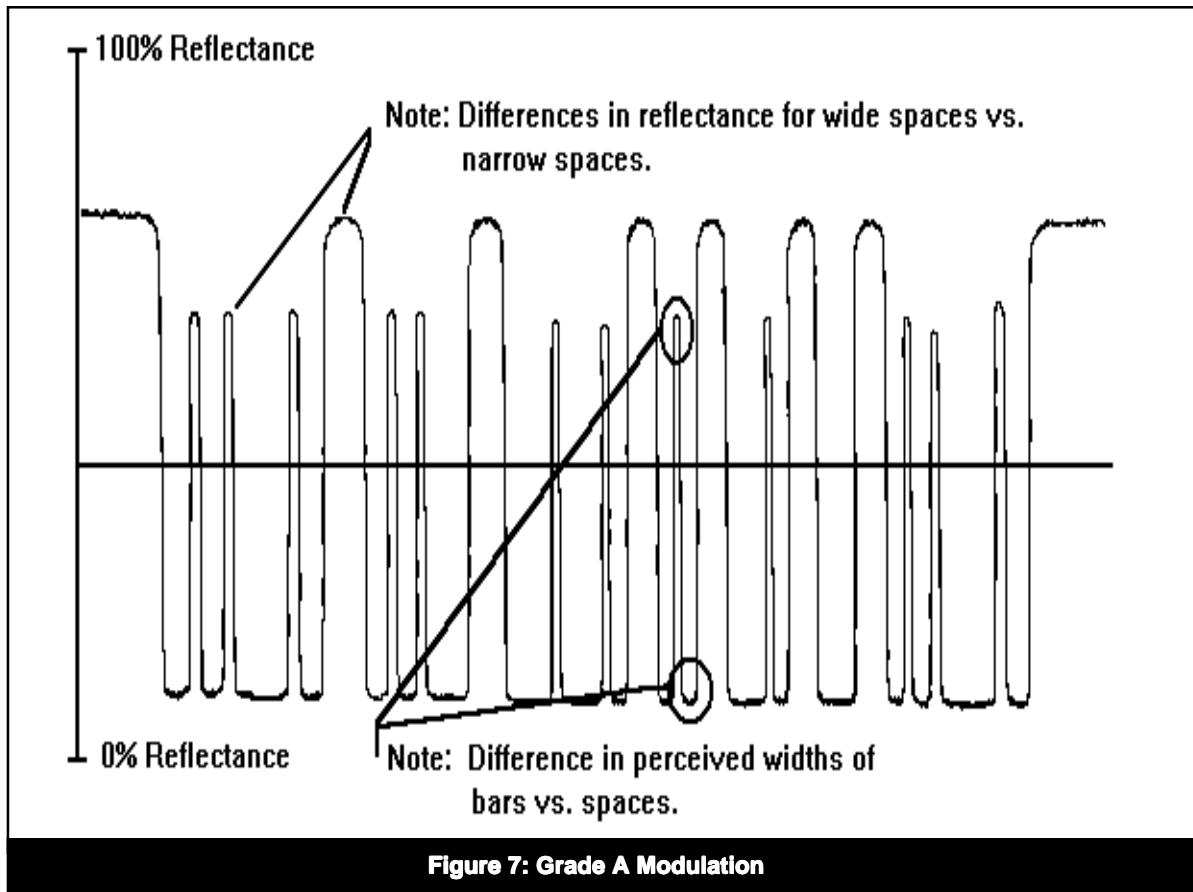

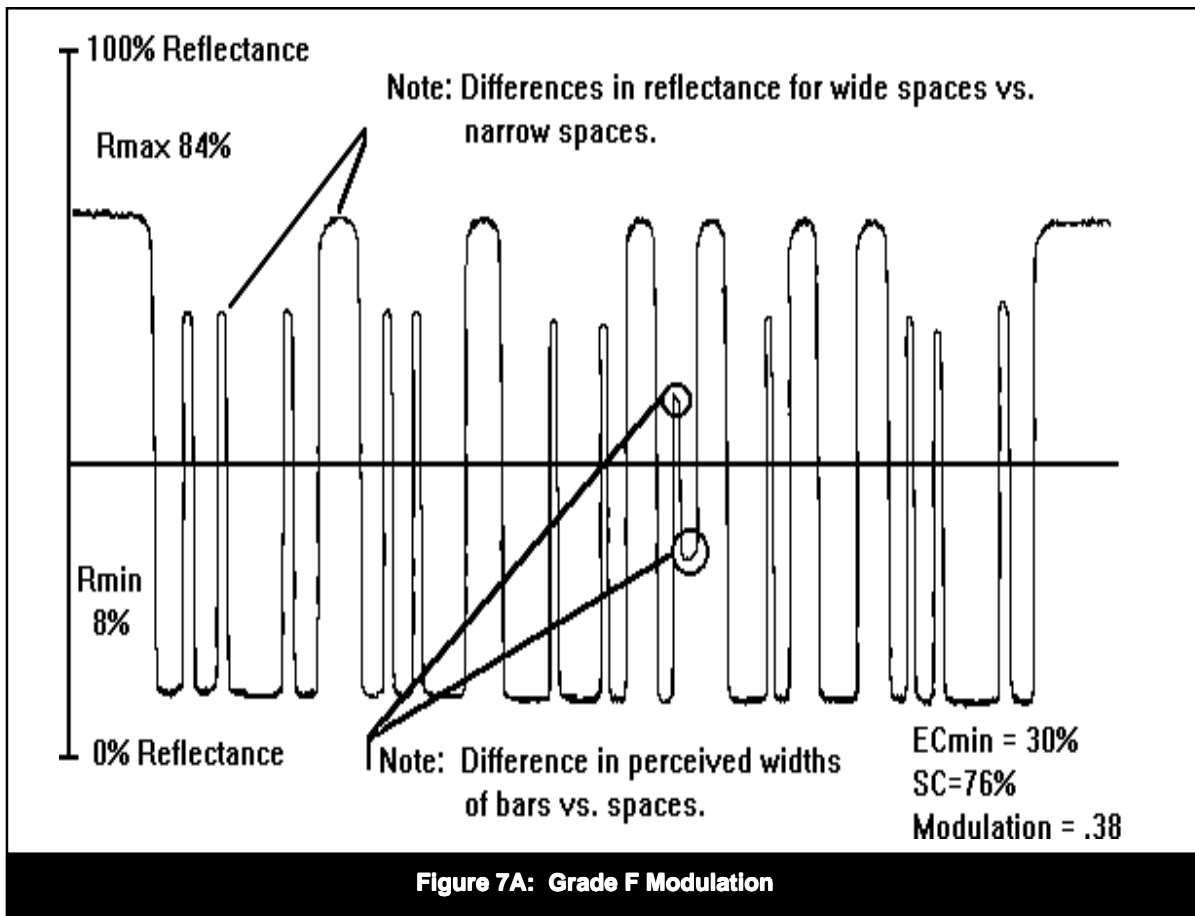

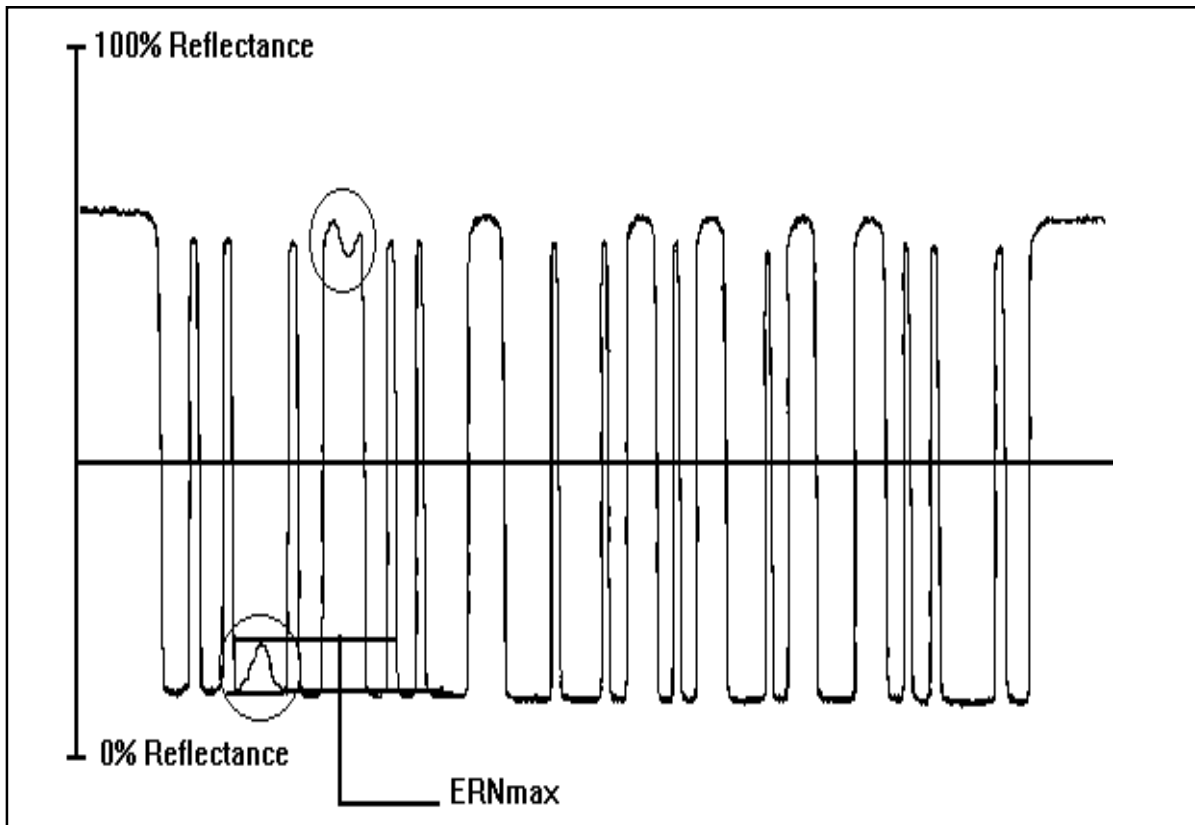


Figure 8: Grade A Defects

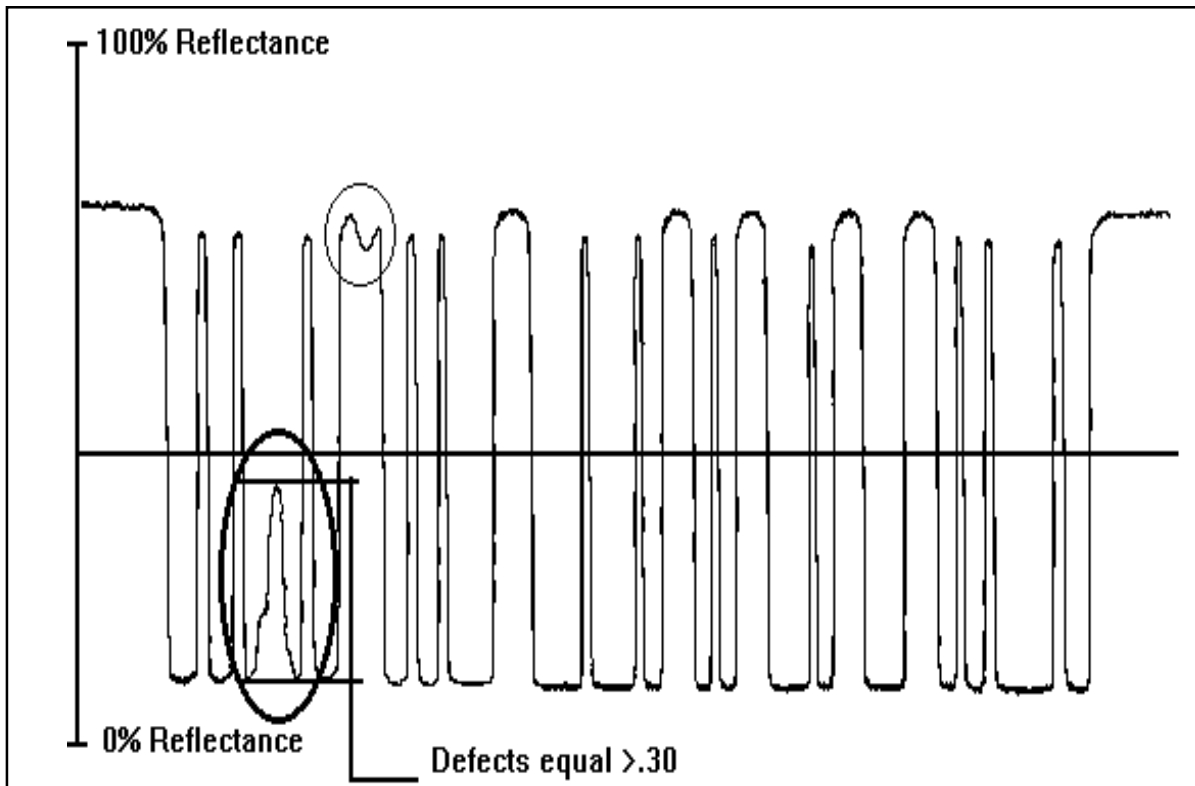


Figure 8A: Grade F Defects

3.6 Defects (Graded)

ERN_{max} = Element Reflectance Non-uniformity
SC = Symbol Contrast

Formula:

$$\text{ERN}_{\text{max}}/\text{SC}$$

≤.15 = A
≤.20 = B
≤.25 = C
≤.30 = D
>.30 = F

Definition:

Defects are voids found in bars or spots found in the spaces and quiet zones of the code. Each element is individually evaluated for its reflectance non-uniformity. Element reflectance non-uniformity is the difference between the highest reflectance value and the lowest reflectance value found within a given element. Many elements may have zero non-uniformity. (See figure 8 for grade A in Defects and figure 8A for grade F in Defects)

3.7 Decodability (Graded)

Formula:

Different decodability calculation methods are used for each type of symbology being tested. Please refer to the ANSI X3.182-1990 Bar Code Print Quality Guideline for the formulas.

Definition:

Decodability is the measure of the accuracy of the printed bar code against the appropriate reference decode algorithm. Each symbology has published dimensions for element widths and provide margins or tolerances for errors in the printing and reading process. Decodability measures the amount of margin left for the reading process after printing the bar code.

3.8 Decode (Pass/Fail)

Definition:

A bar code will Pass on Decode when the established bar and space widths can be converted into the correct series of valid characters using the ANSI Reference Decode algorithm for a given symbology and or application.

4 Scan Grade

The Scan Grade is the lowest grade received for any quality parameter in a reflectance scan profile. For example, if a grade of A or Pass is received for all quality parameters except for Modulation, which received a grade of C, the overall Scan Grade is C.

5 Overall Symbol Grade

ANSI X3.182 states that the Overall Symbol Grade is based on ten scan profiles, and the average of their resultant scan grades as defined above. The reason for averaging ten scans is purely for vertical redundancy. Quality levels could vary within the height of the bar code being verified.

6 Numeric Conversion

It is possible to convert the Overall Symbol Grade to a Numeric grade. Since a grade A is a range of 3.5 to 4.0, this shows how close a given symbol is to achieving either a grade higher or grade lower. Please see page 15 for the flow chart and Numeric Conversions.

7 Significance of Grade Level

Bar code systems can provide good performance with differing symbol grades because of the following:

- a) vertical redundancy;
- b) tolerances built into decoding algorithms;
- c) the ability of operators to rescan if the first read is unsuccessful;
- d) the availability of scanning devices that provide for multiple, unique scan paths across the

code.

The different symbol grades indicate print quality. An application specification shall identify the minimum acceptable grade level including the measuring aperture and the nominal wavelength(s).

Symbols with a grade A are the best quality and will in general give the best performance. In general, this grade symbol is appropriate for systems in which the reader crosses the symbol once or is limited to a single path.

A symbol with a grade of B may not perform to the same level as one with a grade of A. Some of these B symbols may need to be rescanned. In general, this grade is best suited for applications which require symbols to be read most of the time in a single pass of a bar code scanner but allow for rescan.

Symbols of grade C may require more rescans than those of grade B. In general, these grade C symbols may need more frequent rescanning and for best read performance a device that provides for multiple, unique scan paths across the code should be used.

A symbol of grade D is best read by bar code readers that provide for multiple, unique scan paths across the symbol. There may be symbols with a D grade that certain readers can not read. Prior to selection of a grade D symbol for a particular application, it is advised that the symbol(s) should be tested with the type of bar code reader expected to be used. The test(s) will establish that the read results are within acceptable limits and expectations.

The ANSI grading methodology, utilizing grade letter A, B, C, D, and F is intended to give an idea as to the first pass read rate based on 'real world' average reading and decoding technology. It is conceivable that bar codes obtaining scan profile grades of F may have very good first pass read rates when being read with readers/decoders that are very aggressive. The grading structure does not necessarily mean that a lower grade is bad or that the bar code will not read, but rather as compared to 'average' scanner/decoder technology, the first pass read rate will be lower.

It should be further explained that the evaluation of bar code quality must match the application. Bar codes going through multiple processes such as laminating, shrink wraps, etc. should be verified after all processes have been completed. Dependent on the application, different grades might be

required for each process to obtain the final acceptable grade for the reading environment.

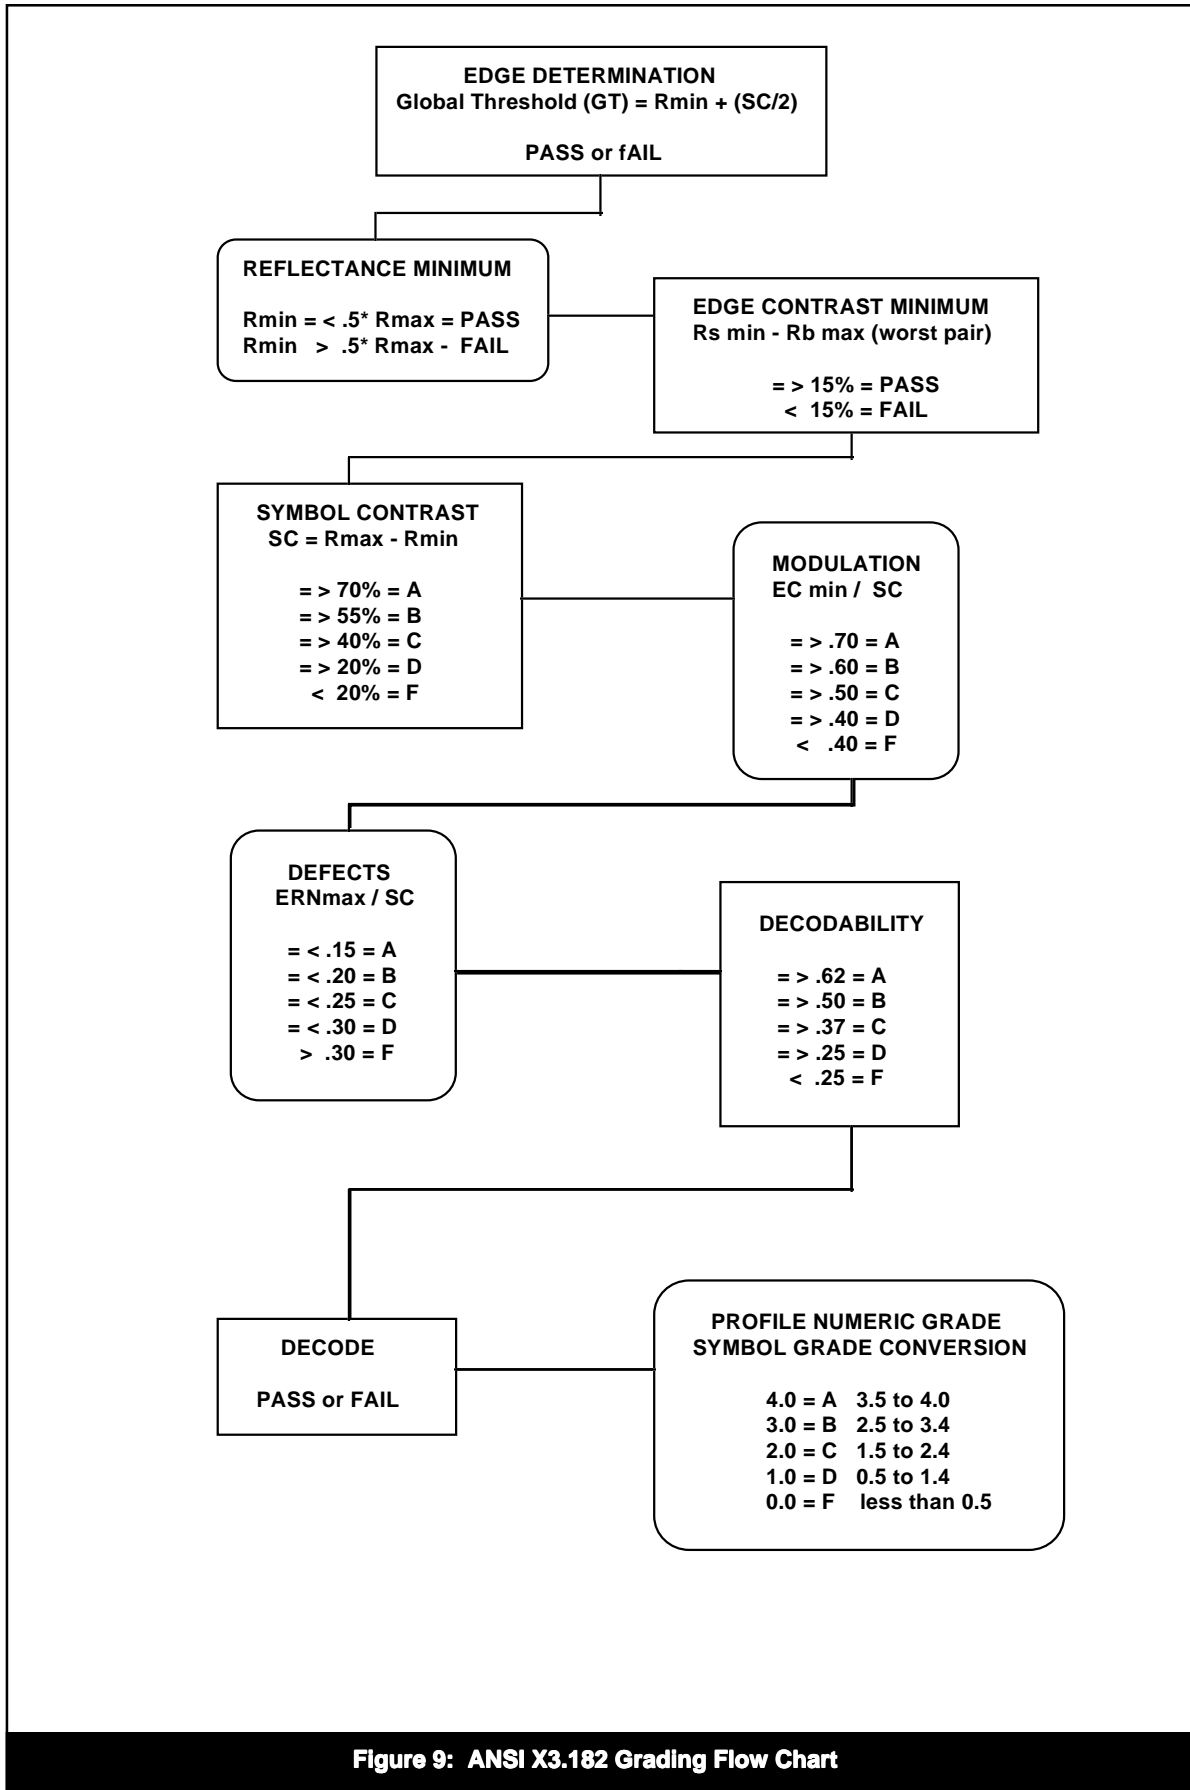


Figure 9: ANSI X3.182 Grading Flow Chart

Reference Documents

**AIM USA “Guidelines on Symbology Identifiers”
(Item X-50)**

**AIM USA Code 49 Developers Diskette (Item
Z-40)**

**AIM USA PDF417 Developers Diskette (Item Z-
46)**

**AIM USA Code One Developers Diskette (Item
Z-47)**

AIM USA “Uniform Symbology Specifications”

Interleaved 2-of-5 (Item X5-1)

Code 39 (Item X5-2)

Codabar (Item X5-3)

Code 128 (Item X5-4)

Code 93 (Item X5-5)

Code 16K (Item X5-6)

Code 49 (Item X5-7)

Code One (Item X5-8)

PDF417 (Item X5-9)

Available from:

AIM USA

634 Alpha Drive

Pittsburgh, PA 15238-2802

Phone: 412-963-8588

Fax: 412-963-8753

**ANSI X3.182, “Bar Code Print Quality —
Guideline”**

Available from:

The American National Standards Institute

11 West 42nd St., 13th Floor

New York, NY 10036

Phone: 212-642-4900

Fax: 212-398-0023



AIM USA
634 Alpha Drive
Pittsburgh, PA 15238 USA
Phone: 412-963-8588
FAX: 412 963 8753
BBS: (412) 963-9047
email: tech@aimusa.org
World Wide Web: <http://www.aimusa.org>